

Safewell is proud to be an authorised Donaldson Compressed Air & Gas Products Distributor for the Energy and Industrial Sectors.

Safewell is a leader in the life cycle holistic safety management of industrial processes.

Quality of Compressed Air Used for Respiratory Protection in accordance with International Breathing Air Standard BS EN12021:2014 and Medical Pharmacopoeia Breathing Gas Standards. We provide air purification products, air quality testing, safety training and life cycle spares, calibration, servicing and support

Quality of Compressed Air Used in Pharmaceutical / Food Production and Industrial Processes in accordance with ISO 8573-1:2010, Compressed Air Part 1: Contaminants and Purity Classes. We provide air purification products, air quality testing, safety training and life cycle spares, calibration, servicing and support for a range of market sectors

Safety of Automation Systems used on Commercial Dive Support Vessels in accordance with IEC61508 – Functional Safety of Electrical/Electronic/Programmable Electronic Safety-related Systems (E/E/PE, or E/E/PES). Including functional safety audits and design and development of industrial automation systems

This Donaldson CAP Data Sheet is Delivered to you by Safewell

Please contact us today for technical assistance, competitive pricing and excellent customer service: sales@safewell.info



HEATLESS ADSORPTION DRYERS ULTRAPAC CLASSIC





Adsorption Drying – why?

Only dry compressed air is also clean compressed air, because the moisture in the compressed air network conjoins dirt particles, which could lead to corrosion, production downtimes and losses in the production quality.

Donaldson's high efficiency adsorption dryers remove moisture from the compressed air and therefore guarantee an efficient and secure production process. State-of-the-art technology and selected materials are the basis for high operational safety. The Ultrapac is equipped with the most modern control system, pre- and afterfilter, condensate drain and silencer.

Maximum efficiency and the highest operational safety, coupled with low operational costs are attributes that convey the advantages of the adsorption dryer. The areas of application are diverse and are matched to the exact requirements of the customer.

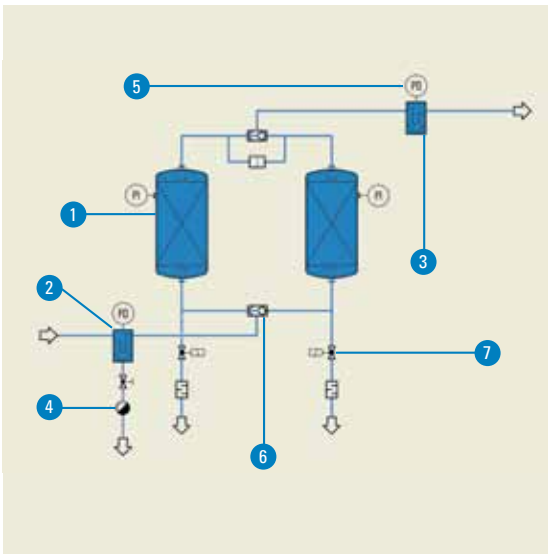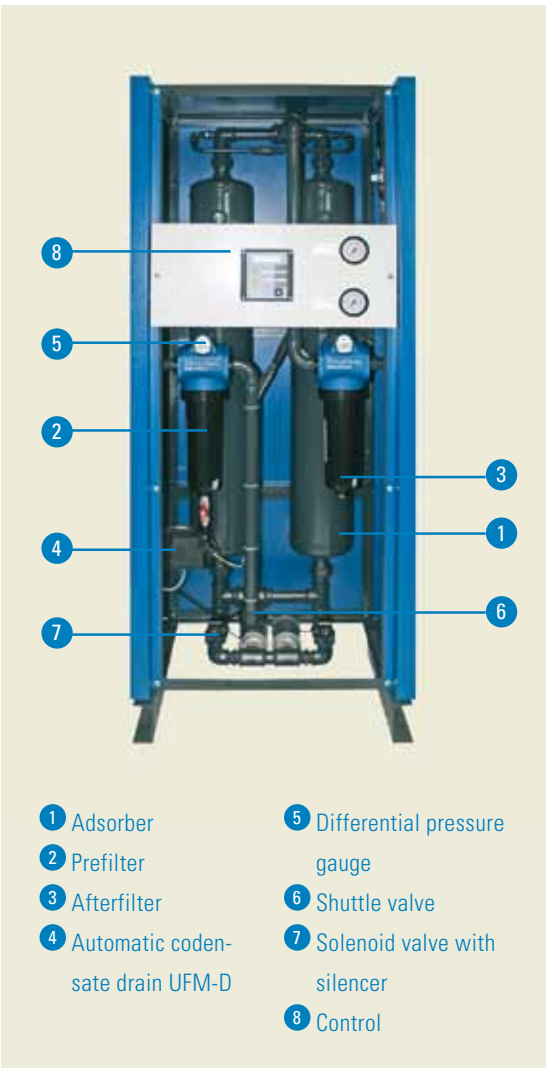


The time-controlled adsorption dryer without capacity control operates with a predetermined cycle time for which the dryers is designed, irrespective whether the desiccant might be loaded to the maximum. The dryer's requirement for regeneration air (energy consumption of compressed air) therewith remains constant.

rol with new user-friendly Functions




The water load of the dryer depends on the actual operational conditions. If the inlet conditions, air-flow, pressure or ambient temperatures vary, the quantity of the water loading will also vary.

With a continual dewpoint measurement at the outlet of the dryer, the newly developed "Ultraconomy" control will determine the actual amount of moisture that enters the dryer and will assess the optimum time when the dryer requires regenerating whilst maintaining a constant selected dewpoint.

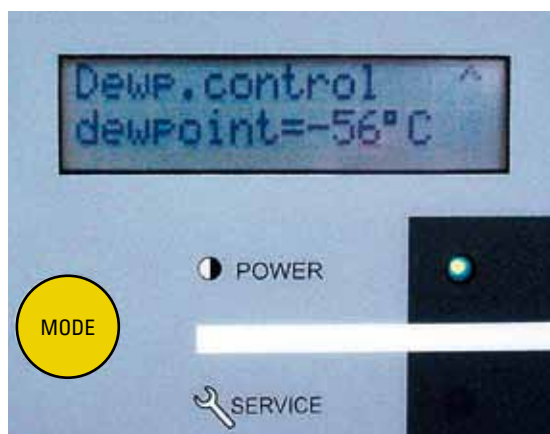

This leads to considerable savings in regeneration air. An example exemplifies this: a dryer designed for 100 m³/h, 35 °C inlet temperature and 7 bar (g) operational pressure uses approx. 15 m³/h regeneration air during a fixed cycle. At an average compressed air requirement of 60 %, an average inlet temperature of 30 °C and average pressure of 7.2 bar the water load only still amounts to approx. 45 % of the original value. On average the dryer is now only using 6.75 m³/h and is therewith saving 8.25 m³ per hour. According to compressor type and condition this is equivalent to a power consumption of up to 1 kW.

At a full cost price of 2 cents per m³ of generated compressed air and 8,000 operating hours per year the saving amounts to Euro 1,320.

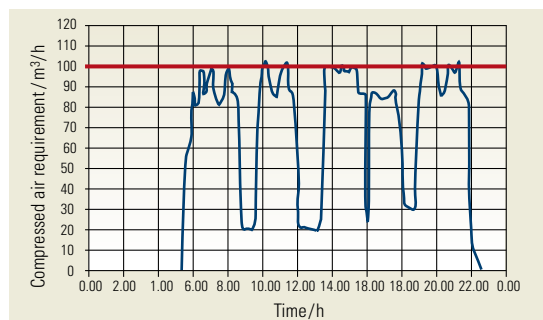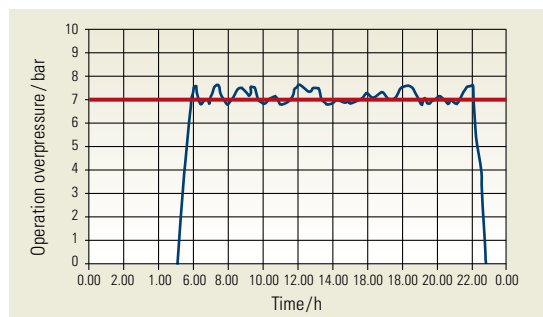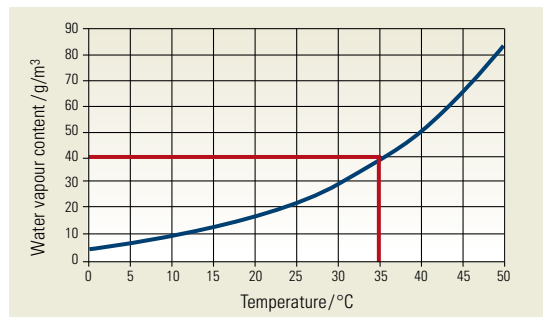


Options: Ultrapac Classic HED/ALD/MSD

- Pneumatic control
- Alternative power supply (24 V DC, 110 V AC)
- Dryers as silicone and separating agent free models
- Frostproof trace heating
- Bypass lines
- Pressure controlled automatic start-up device
- Pressure and temperature monitoring

Technical Data Ultrapac Classic

Type HED/ALD/ MSD	Nominal inlet flow m³/h (1 bar, 20 °C)*	Average reg. air flow m³/h (1 bar, 20 °C)			Connection DN "	Dimensions		
		HED	ALD	MSD		Width (A) mm	Depth (B) mm	Height (C) mm
0005	5	0.7	0.8	1	G 3/8	470	340	700
0010	10	1.4	1.5	2	G 3/8	470	340	700
0015	15	2.1	2.3	3	G 3/8	470	340	1060
0025	25	3.5	3.8	5	G 1/2	470	340	1060
0035	35	4.9	5.3	7	G 1/2	470	340	1060
0050	50	7.0	7.5	10	G 3/4	670	460	1610
0080	80	11.2	12.0	16	G 3/4	670	460	1610
0100	100	14.0	15.0	20	G 1	670	460	1610
0150	150	21.0	23.0	30	G 1	770	680	1980
0175	175	24.5	26.3	35	G 1	770	680	1980
0225	225	31.5	34.0	45	G 1 1/2	770	680	1980
0300	300	42.0	45.0	60	G 1 1/2	770	680	1980
0375	375	52.5	56.0	75	G 1 1/2	950	770	2190
0550	550	77.0	83.0	110	G 2	950	770	2190
0650	650	91.0	98.0	130	G 2	950	770	2190
0850	850	119.0	128.0	170	G 2	1100	880	2350
1000	1000	140.0	150.0	200	G 2	1100	880	2350



Explanation:
* Related to the intake of the compressor
+20 °C, 1 bar abs., at a compressed air inlet
temperature of +35 °C and 7 bar (g) operating
pressure.

Conversion factor f

Type	Pressure dewpoint	Inlet temperature	Operating overpressure (bar)												
			4	5	6	7	8	9	10	11	12	13	14	15	16
HED/ALD	-20 °C/-40 °C	25 °C	0.75	0.90	1.05	1.20	1.35	1.50	1.65	1.80	1.95	2.10	2.25	2.40	2.55
		30 °C	0.69	0.83	0.96	1.10	1.24	1.38	1.51	1.65	1.79	1.93	2.06	2.20	2.34
		35 °C	0.63	0.75	0.88	1.00	1.13	1.25	1.38	1.50	1.63	1.75	1.88	2.00	2.13
MSD	-40 °C	25 °C	0.75	0.90	1.05	1.20	1.35	1.50	1.65	1.80	1.95	2.10	2.25	2.40	2.55
		30 °C	0.69	0.83	0.96	1.10	1.24	1.38	1.51	1.65	1.79	1.93	2.06	2.20	2.34
		35 °C	0.63	0.75	0.88	1.00	1.13	1.25	1.38	1.50	1.63	1.75	1.88	2.00	2.13
		40 °C	0.50	0.60	0.70	0.80	0.90	1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70
		45 °C	0.44	0.53	0.61	0.70	0.79	0.88	0.96	1.05	1.14	1.23	1.31	1.40	1.49
		50 °C	0.31	0.38	0.44	0.50	0.56	0.63	0.69	0.75	0.81	0.88	0.94	1.00	1.06

Example: $V_{nom} = 200 \text{ m}^3/\text{h}$, Inlet temperature = 30 °C, Operating pressure = 10 bar, Pressure dewpoint = -40 °C
Calculated dryer size: Ultrapac ALD 0150

$$V_{corr} = \frac{V_{nom}}{f} = \frac{200 \text{ m}^3/\text{h}}{1.51} = 132.5 \text{ m}^3/\text{h}$$

Donaldson
Ultrafilter

Compressed Air Filtration · Filters for Sterile Air, Steam and Liquids · Refrigerant
Drying · Adsorption Drying · Condensate Drains · Condensate Purification Systems ·
Process Air and Gas Processing



Donaldson
FILTRATION SOLUTIONS

Total Filtration Management

Donaldson offers a wide variety of solutions to reduce your energy costs, improve your productivity, guarantee production quality and help protect the environment.

Total Filtration Service

A compressive range of services especially designed to keep your production at peak performance and at the lowest total cost of ownership.

Please contact us:

Donaldson Europe B.V.B.A.

Research Park Building No. 1303 · Interleuvenlaan 1

B-3001 Leuven · Belgium

Phone +32(0)16 38 38 11 · Fax +32(0)16 40 00 77

CAP-europe@donaldson.com · www.donaldson.com